




FIXINGS

ANGLE BRACKETS

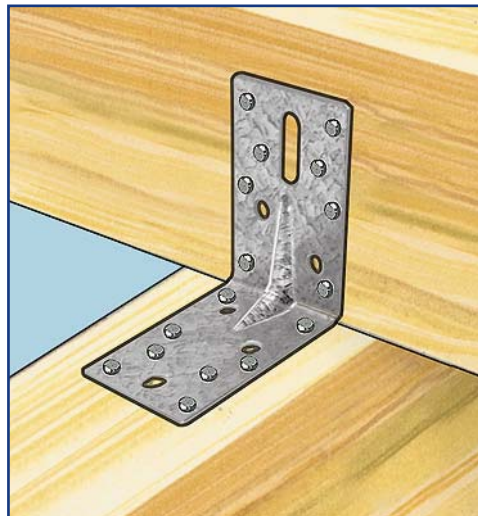

BAT Angle Brackets are designed for multi-purpose fixing applications and can be used as replacement cleats, nailed or bolted.

Design Features

- Manufactured from hot dipped pre-galvanised mild steel to BS EN 10327 : 2004, DX51D + Z275.
- Light Duty: AB604060 2mm thick
- Heavy Duty: HD9090; HD15090; HD150150, 2mm thick, ribbed

Installation Requirements

Angle Brackets may be used for timber/timber, timber/steel and timber/masonry connections. May be fixed with nails, bolts or coach screws. Must be used in pairs.

SIZE	QTY PER BOX
60x40x60mm (Light Duty)	100
90 x 90 x 63mm (Heavy Duty)	50
150 x 100 x 63mm (Heavy Duty)	50
150x150x63 (Heavy Duty)	50

Nailed Safe Working Loads kN (per pair)		
Type	Uplift	Shear
AB604060	1.2	1.8
HD9090	1.6	3.6
HD15090 HD150150	1.4	4.6
BS 5268 Pt 2 Long term loads		
Nails 3.75 x 30mm long square twisted sherardised		

