




WALL TIES

WALL TIE WITH DEBONDING SLEEVE

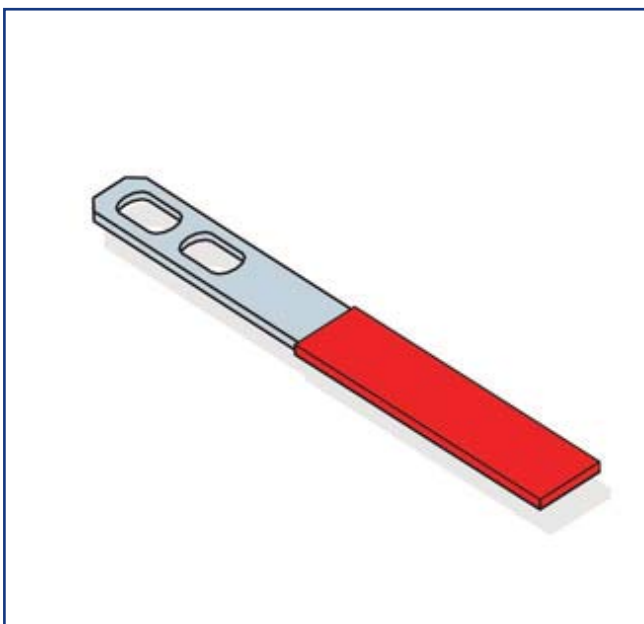

SIZE(mm)
200

QTY PER BOX
250

Movement joints are necessary in masonry wall panels to cater for the natural movement of buildings. Tensile and compressive forces can develop that lead to cracking and bowing of walls.

BS5628-3 details the provision of movement joints in clay, calcium silicate, concrete and stone masonry.

Power-Tie Movement Ties allow expansion and contraction at movement joints whilst providing shear resistance between adjacent panels and supports. Placing the sleeve on the plain end of the movement tie with 10mm clearance, debonds the tie from the mortar joint, permitting longitudinal movement.